



2-post lift SPM40AV

GTIN: 5063084982285

SKU: ROT.SP40X.982285

4.0 t, electromechanical, AV arms, symmetrical posts,
3-stage long arms, 3-stage short arms, TEq-Link

DESCRIPTION

Tomorrow Series – The way to the Future

- Reliable and powerful: solid performance even under demanding conditions
- Flexible and versatile: three possible installation widths to satisfy any workshop needs and applicable to a wide range of different vehicles
- Modern and premium: a contemporary look meets the premium quality of components


Revised technology shaping a modern design. The 2-post lifts of the Tomorrow Series of Rotary raise your workshop immediately into the future. Tested for 20000 cycles and designed for TEq-Link online internet connection, your workshop is prepared for all innovations that are yet to come.

- The geometry of the arms is designed to lift every type of car from classic city cars to vans.
- The innovative AV (“All Vehicles”) arms extend 20% further than conventional arms, allowing them to reach the lifting points of a wide range of vehicles.

2-post lift SPM40AV

2 / 6

- High-performance motors.
- Automatic arm lock and automatic ground release: conical geometry with self-locking effect.
- Permanent and automatic lubrication of the nuts to ensure effective operation during upward and downward movement.
- High-strength rolled steel screw for maximum durability.
- Arms made of special steel, with first stage height just 70 mm and second stage height 85 mm.
- Equipped with an acoustic anti toe trap system – Free from mechanical foot guards.
- Premium quality of components:
 - Aluminium pulley with cooling function.
 - Long lasting bearings.
 - 50% longer, bronze load nut.
 - Motors with reinforced and cooling casing.
 - Solid automatic arm locking.

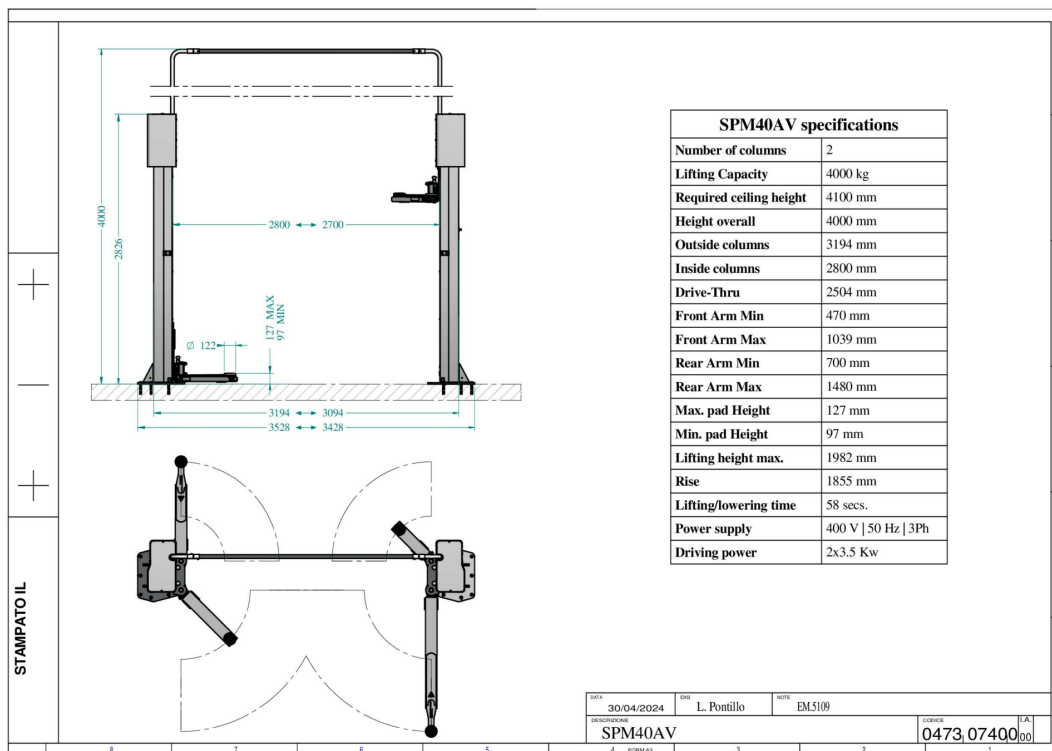


ACCESSORIES



Tool trays

VSG.2CALL.902641

Magnetic | 1 set / 2 pieces



Pads

VSG.2CALL.901538


Support plate, rubber pad, rectangular | for Tesla | 1 set / 4 pieces



Pads

VSG.2CALL.902146


Prism | for VW MEB platform E-vehicles | 1 set / 4 piece



Pads

VSG.2CALL.899989

Support plate, U-support | Only for AV arms | 1 set / 4 pieces



Pads

VSG.2CALL.901606


Mandrel | for Fiat Ducato, Peugeot Boxer, Citroën Jumper - front and rear | 1 set / 4 pieces



Spacers for pads for electromechanical lifts

VSG.2CALL.901071

4 x 89 mm, 4 x 127 mm, incl. 2 brackets for mounting on the pillars | 1 set / 8 pieces



Spacers for pads

VSG.2CALL.901248

4 x 200 mm, incl. bracket for mounting on the pillars | 1 set / 4 pieces



Pads

FJ6216C


Support plate, rubber pad, round | Ø 80 mm | 1 set / 4 pieces



Pads

VSG.2CALL.902023

Support plate, centering mushroom | for Fiat 500E, 500 ABARTH | 2-stage | 1 set / 4 pieces



Pads

VSG.2CALL.901330

Support plate, U-support | 1 set / 4 pieces



Pads

VSG.2CALL.901859


Prism | for Mercedes G-Class - front and rear | 1 set / 4 pieces



Pads

VSG.2CALL.901712

Prism, mandrel | for Mercedes Sprinter, VW Crafter | 1 set / 6 pieces



Spacers for pads

VSG.2CALL.899996

4 x 90 mm, 4 x 127 mm, incl. 2 brackets for mounting on the pillars | Only for AV arms | 1 set / 8 pieces




Pads frame adapters kit

VSG.2CALL.901163

Pads frame adapters kit Ø 120 mm (1 set, 2 pcs), for turntable

ACCESSORIES



Vehicles lift platforms

VSG.2CALL.902818


Ramp height 60 mm, for extremely low vehicles | 1 set / 2 pieces



Stands for alignment

VSG.2CALL.902085

1 set / 4 pieces



Tool support

VSG.2CALL.902511

Ergonomic holder for impact wrench



Eyebolt

VSG.2CELM.901927

3.5 t – 4.2 t | facilitates installation of the lift, can be used again for other installations | 1 set



Crossbar height adjustment

VSG.2CELM.902344

Kit for increasing overhead cable passage height by up to +1.5 m | for spindle lifts | 1 set



Support plates

VSG.2CALL.901453

4 / 4.2 / 4.5 t | allows installation on floors with poor capacity or lower concrete thickness | 1 set / 2 pieces



Inground cable connection kit

VSG.2CELM.902498

Allows columns connection cables to be placed inground | 1 piece



Supporting arm extensions

VSG.2CELM.903044

Capacity reduced to 3.7 t | for LK arms | 1 set / 2 pieces

TECHNICAL DETAILS

Number of columns	2
Capacity	4000kg
Column layout	Symmetrical
Mode of drive	Electromechanical
Control	rotating switch
Type of installation	Floor mounted
TeqLink	Standard
Max. lifting height	2011mm
Lifting time	58s
Min. plate height	97mm
Max. plate height	127mm
Clear span between	2700 - 2800mm
Clear span between (out)	3194 - 3094mm
Column height	2863mm
Drive-through width	2504mm
Required ceiling height	4100mm
Surface coating	Powder coated
Arm layout	Asymmetrical
Telescopic front arms	3-fold
Telescopic rear arms	3-fach
Min. front arm length	470mm
Max. front arm length	1039mm

2-post lift SPM40AV

6 / 6

Min. rear arm length	700mm
Max. rear arm length	1480mm
Driving power	2 x 3,5kW
Electrical connection	400 V, 50 Hz
Width	3428 - 3528mm
Height	4000mm
Max. height	4000mm